


Submitted Model No.: _____

Specific Features: _____



▲ Designate proper finish suffix

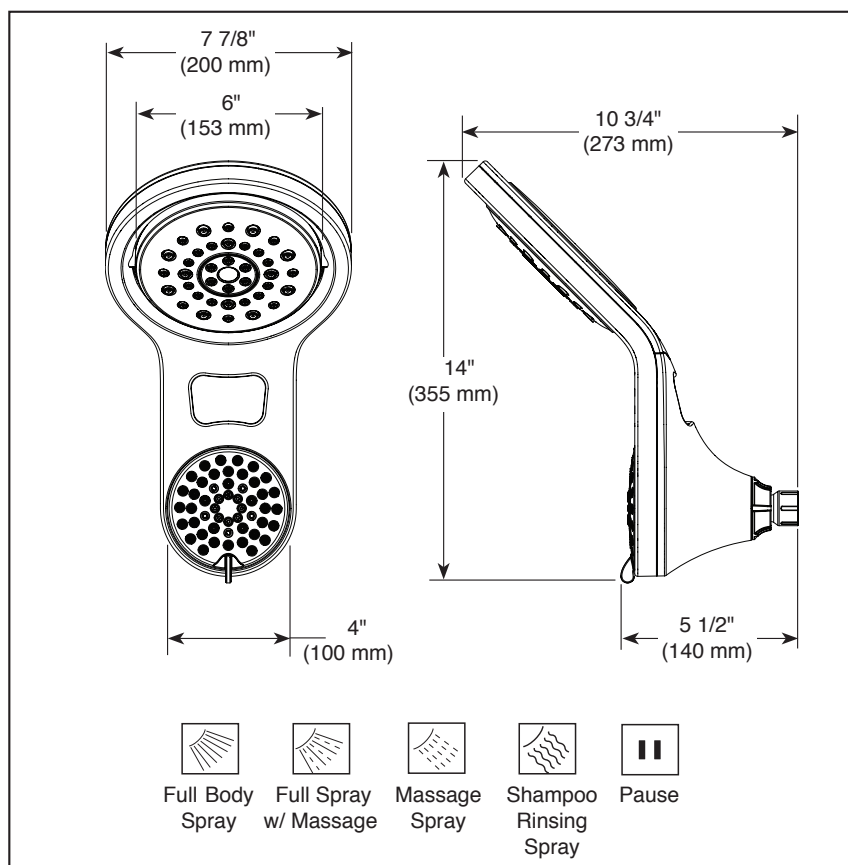

see what Delta can do™

RAINCAN SHOWER HEAD/FIXED COMBO

■ 5-Spray Setting Shower Head

FEATURES:

- Touch-Clean® Nozzles

STANDARD SPECIFICATIONS

- Maximum 1.75 gpm @ 80 psi, 6.6 L/min. @ 550 kPa (58580-▲-PK)
- Maximum 2.5 gpm @ 80 psi, 9.5 L/min. @ 550 kPa (58580-▲25-PK)
- Five function shower head - pause is a non-positive shut-off
- Change shower head spray settings by rotating the spray face
- Single function raincan
- Diverter allows for single or shared operation of shower head and Raincan
- The brass ball joint swivel angle is 10° (5° per side)
- The Raincan rotates 40° for adjustable coverage

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) – 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® - Applies to 58580-▲-PK only

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-58580-PK Rev. D

Delta Faucet Company

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
© 2019 Delta Faucet Company