




145.1170 | Floor Mounted Tub Filler With Hand Held Shower

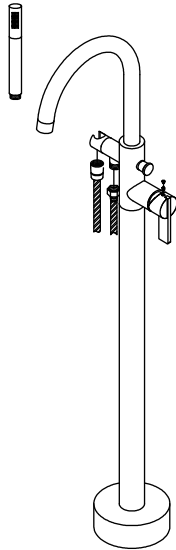

SPECIFICATIONS:

- Solid Brass construction - includes valve
- Floor Mount Installation
- Hand shower flow rate = 1.8 GPM @ 60 PSI w/ back flow prevention
- Diverter knob controls water flow between spout and hand held
- 9.0 GPM spout flow rate.
- Single Lever allows both volume and temperature control
- With swivel spout
- Includes anti-scald ring located on cartridge.

STANDARDS:

- ASME A112.18.1 / CSA B125.1



Legislation Compliance



ZeroDrip Technology



Technical Diagram

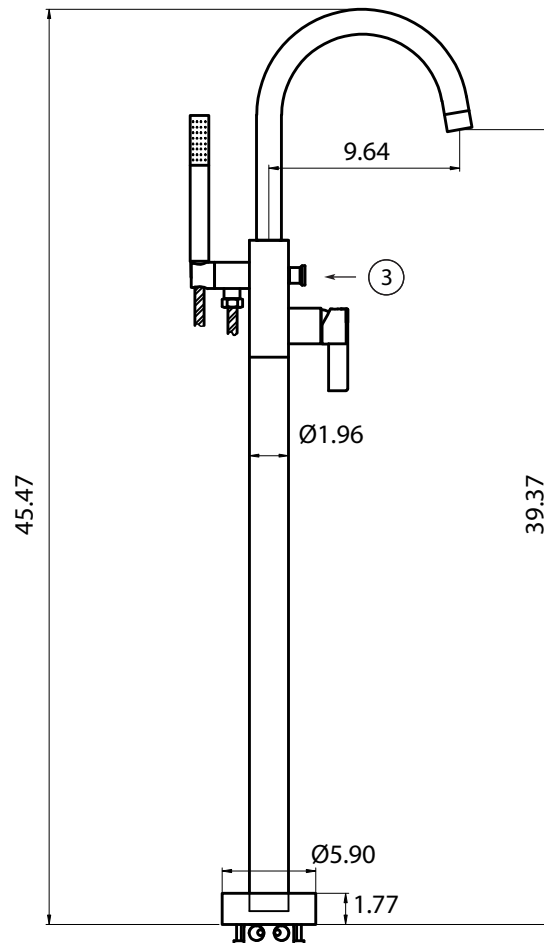

Part Number Guide:

- ① Cartridge - 100.1170-9853
- ② Aerator - 100.1170-2364
- ③ Push / Pull Diverter - 100.1170-1991CP - Chrome