


**260.1165 | Floor Mounted Tub Filler With Hand Held Shower**

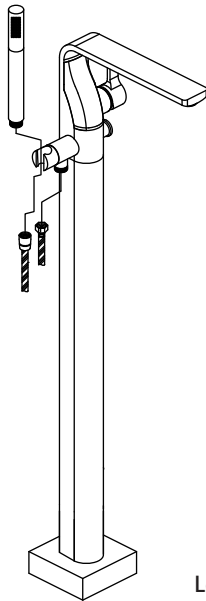

**SPECIFICATIONS:**

- Solid Brass construction - includes valve
- Floor Mount Installation
- Hand Shower Flow Rate = 1.8 GPM @ 60 PSI
- Diverter knob controls water flow between spout and hand held
- 8.0 GPM Spout Flow Rate
- Ceramic Disc Cartridge Allows Both Volume and Temperature Control
- Includes anti-scald ring located on cartridge

**STANDARDS:**

- ASME A112.18.1 / CSA B125.1

Legislation Compliance

ZeroDrip Technology



**Technical Diagram**

