HINGISTRICT


Collection:Silas
Installation manual for:

LD7302W24BRA W24"*E6.9" H9.9" L3

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert the mounting bracket screw(P2) into the mounting bracket (P1).
- 6.Useing the nut(P3) to lock the lamp body onto the mounting bracket (P1) on the wall.
- 7.Install E12 light source.(Bulbs not supplied).
- 8. Twist the glass shade(P13) onto the lamp body.

The end!

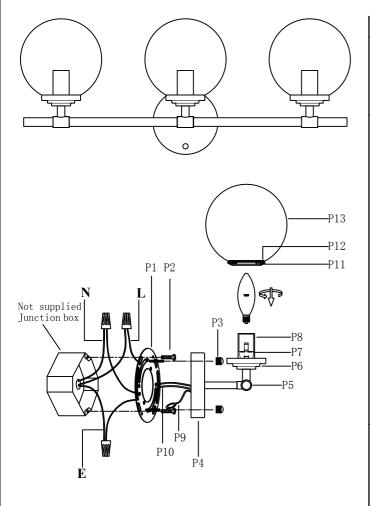

Part	Picture	Description	Qty
P1		Mounting bracket Φ4"*H1.2"	1
P2		Mounting bracket screw	2
Р3		Nut	2
P4		Backplate (Φ4.7"*H1")	1
P5		Double head tube (L23.6"*H1.6")	1
Р6		Multilayer cup Φ2.8"*H0.8"	3
P7		Light cup Φ1.2"*H2.0"	3
P8		E12 holder	3
Р9		UL18#Ground wire, L9.8"	1
P10	\approx	UL18#, L8″	1
P11		Aluminum ring Φ2.7"*H0.3"	3
P12		Plate Φ1.8"*T0.1"	3
P13		Glass shade Φ5.9"*H5.7"	3
	P1 P2 P3 P4 P5 P6 P7 P8 P9 P10 P11 P12	P1 Image: Control of the property of the propert	P1

"L" = Hot wire

"N" = Neutral wire "E" = Ground wire