# LIVING DISTRICT
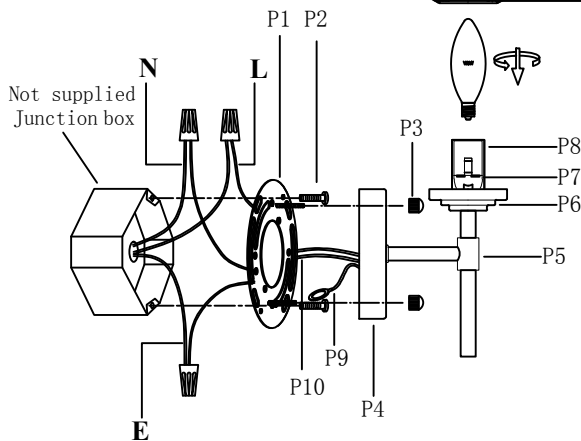
Collection:Silas

Installation manual for:

LD7302W6CH   W5.9"*E6.9" H11.7" L1

# Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire  from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire  from the fixture.
3. "E" wire from the fixture is attaced to the mounting bracket  and an additional  "E" wire from the mounting bracket must  be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert the mounting bracket screw(P2) into the mounting bracket (P1).
6. Useing the nut(P3) to lock the lamp body onto the mounting bracket (P1) on the wall.
7. Install E12 light source.(Bulbs not supplied).
8. Twist the glass shade(P13) onto the lamp body.
The end!



| Part Number | Part | Picture | Description | Qty |
|---|---|---|---|---|
| MB7R03 | P1 | | Mounting bracket Φ4"*H1.2" | 1 |
| | P2 | | Mounting bracket screw | 2 |
| P-LD7302W6CH-1 | P3 | | Nut | 2 |
| | P4 | | Backplate  (Φ4.7"*H1") | 1 |
| | P5 | | Double head tube （L5.3"*H3.8") | 1 |
| | P6 | | Multilayer cup Φ2.8"*H0.8" | 1 |
| | P7 | | Light cup  Φ1.2"*H2.0" | 1 |
| | P8 | | E12 holder | 1 |
| | P9 | | UL18#Ground wire,L9.8″ | 1 |
| | P10 | | UL18#, L8″ | 1 |
| GS7R03CH | P11 | | Aluminum ring Φ2.7"*H0.3" | 1 |
| | P12 | | Plate Φ1.8"*T0.1" | 1 |
| | P13 | | Glass shade Φ5.9"*H5.7" | 1 |

″L″ = Hot wire
″N″ = Neutral wire
″E″ = Ground wire