

# LIVING DISTRICT

Install the E12 light bulb, Don't use halogen bulbs, Please use LED ball bulbs, Wattage within 5W.



Collection:Atlas

Installation manual for:

LD7305W13BLK W12.8" x E7.5" x H4.8" L2

## Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
  2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
  3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
  4. Secure mounting bracket to the junction box.
  5. Insert the mounting bracket screw(P2) into the mounting bracket (P1)
  6. Using the nut(P3) to lock the lamp body onto the mounting bracket (P1) on the wall.
  7. Use the socket ring(P8) to lock the aluminum hemisphere(P11) onto the lamp body
  8. Install LED E12 ball light source.(MAX LED 5W, Bulbs not supplied)
  9. Twist the Acrylic hemisphere(P12) onto the Aluminum hemisphere(P11)
- The end!

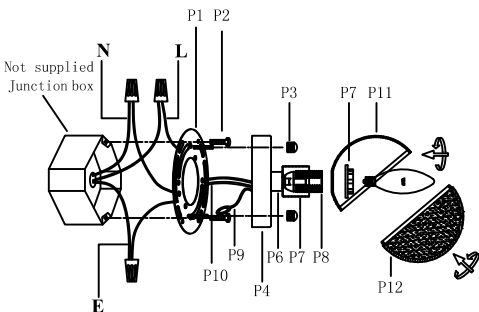

Part Number	Part	Picture	Description	Qty	
MB7R03	P1		Mounting bracket Φ4"×H1.2"	1	
	P2		Mounting bracket screw	2	
P-LD7305W13BLK-I	P3		Nut	2	
	P4		Backplate (Φ4.7"×H1")	1	
	P5		Double head tube (L10.6"×H1")	1	
	P6		Socket Cup (Φ1.6"×H1.4")	2	
	P7		E12 holder	2	
	P8		Socket rings	2	
	P9		UL18#Ground wire,L9.8"	1	
	P10		UL18#,L8"	1	
	GS7R16BK	P11		Aluminum hemisphere (Φ4.7"×H2.4")	2
		P12		Acrylic hemisphere (Φ4.7"×H2.4")	2

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire