



## Installation manual for

1219G40AS/RC、1219G40BK/RC、1219G40BR/RC

Dimensions : L40" W10"H14.8 L6

Collection : NORDIC

Bulb Type : E12 (Candelabra) bulb not included

Lamp Frame Weight : 32.5 LBS

Total Weight : 43.4 LBS



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation. If you have any questions, our professional customer service team is committed to assisting you, please call our toll free HOTLINE AT:



1219G40 L40" W10"H14.8 L6

### SAFETY

**Warning:** MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

### CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.


### Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions. where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

01

1219G40 L40" W10"H14.8 L6

### Frame Assembly Diagram

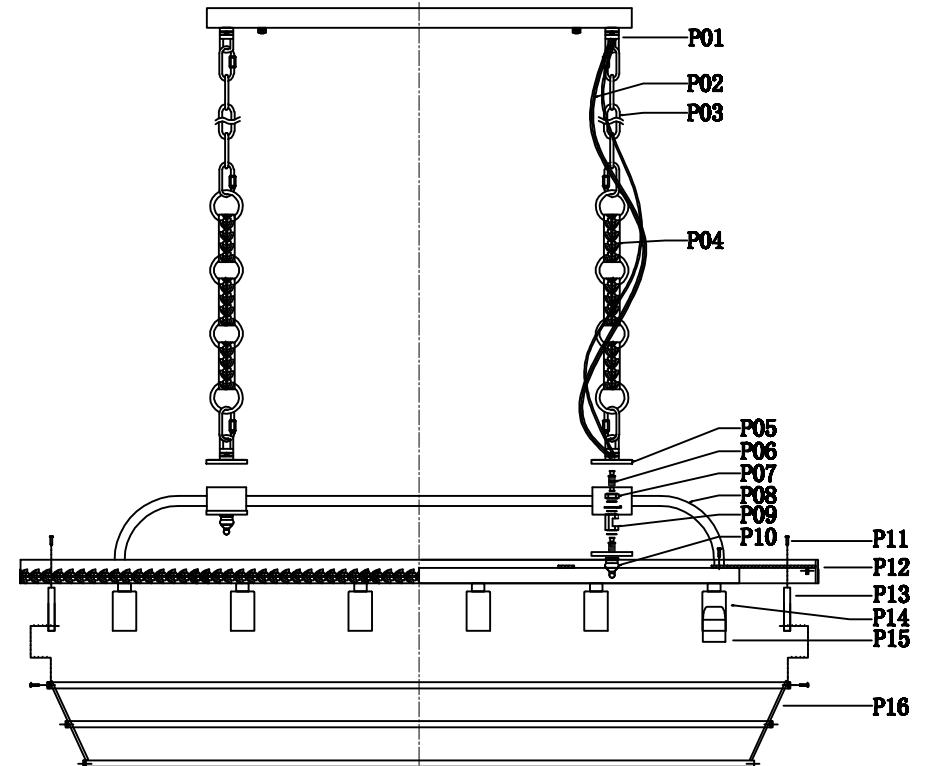

02












# 1219G40 L40" W10"H14.8 L6

## Step 1

Please use the parts list to ensure you are not missing any parts.













1707G50

### PARTS LIST

Part	Picture	Description	Parts number	Qty	Check list
ZA		Junction box not included		1	
ZB		Crossbar L15" (Canopy part)		1	
ZC		Crossbar Screws		2	
ZD		Ceiling Plate L21.3"*W4.7"*H1"		1	
ZE		Nut		2	
ZF		ground wire		1	
ZG		junction caps		2	
P01		DO. 65"H1.25" Quick link		4	
P02		Power Cord 12' /SPT-1-18# Clear/Gold/Black		1	
P03		L47"CHAIN04P Plain Design	CHAIN04P	2	
P04		Chain 2.5"*0.95' (Canopy part)		2	

03

# 1219G32 L32" W10"H14.8 L6

Part	Picture	Description	Parts number	Qty	Check list
P05		Disk		4	
P06		Thread pipe		12	
P07		Nut		4	
P08		L30.3"W2" H4" metal shelf		1	
P09		Double iron		2	
P10		finial		2	
P11		Sunk Crossbar Screws		16	
P12		rosette		1	
P13		Square tube		8	
P14		Socket Cup		6	
P15		E12 socket		6	
P16		Upper lamp frame		1	

04



1219G32 L32" W10"H14.8 L6

**IMPORTANT:** Test sockets with bulb before dressing the fixture.


- 1 .Attach the crossbar to the electrical box.
- 2 .Pass the lamp wire and ground wire through the loop, canopy ring and center hole of canopy cover.
- 3 .Screw 2.5" threaded pipe into the crossbar and fasten with hex-nut.
- 4 .Pull wires up through the nipple.
- 5 .Screw loop only onto threaded pipe.
- 6 .Hang the fixture on chain.
- 7 .Make the electrical connections as detailed in the drawing above.
- 8 .Secure the canopy cover with threaded canopy ring .

07

1219G40 L40" W10"H14.8 L6

Step 3

### Frame Assembly Diagram

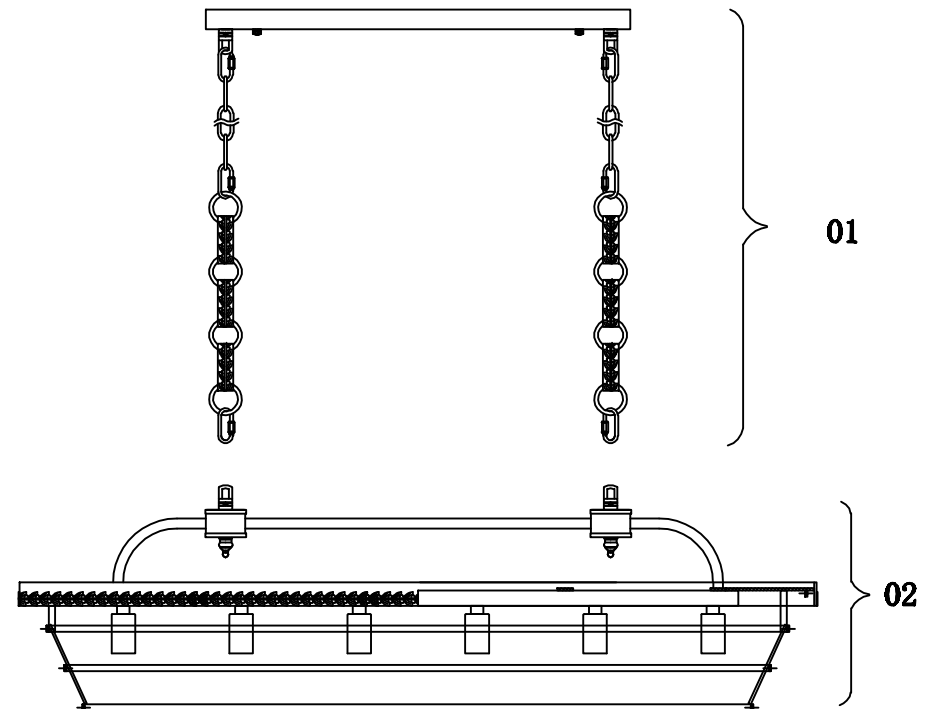

08

1219G40 L40" W10"H14.8 L6

## Frame Assembly Instructions

### Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

1. Hang the canopy parts (01) on the Ceiling Plate.
2. Fasten the fixture loop to hang the whole fixture(02).
3. Screw the Bulb on the Lamp Holder.
4. Follow the crystal instruction to hang the crystal.


09

1219G40 L40" W10"H14.8 L6

Step 4

## Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

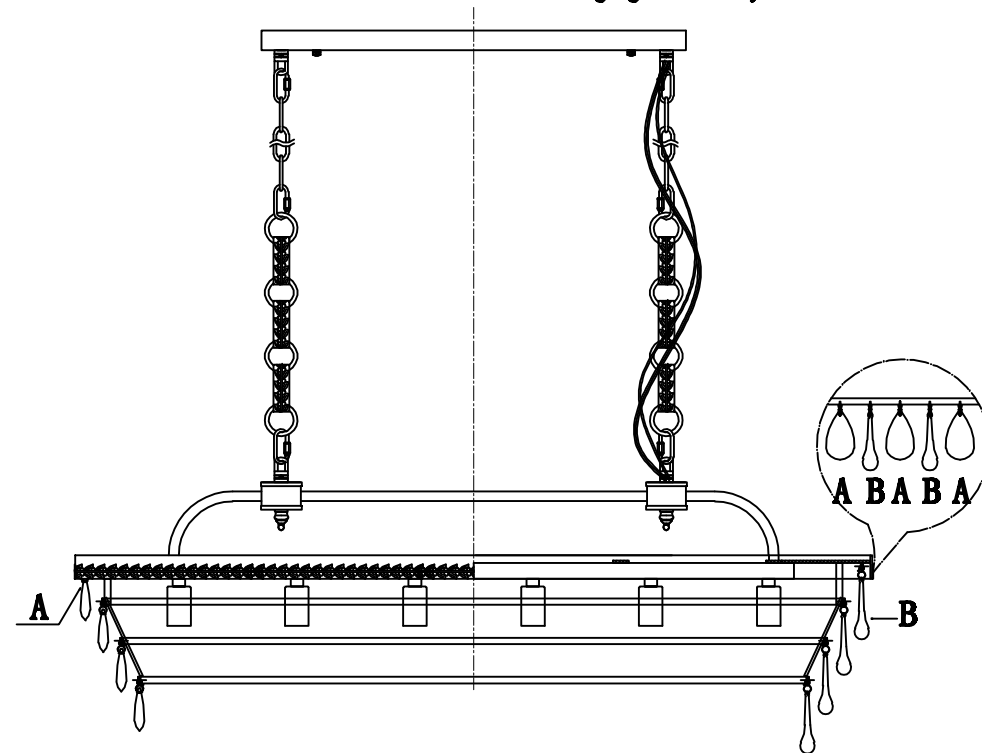

1. Hang the crystal (A) and the crystal (B) on the first circle to the sixth circle of the Lamp Frame as shown in the figure.

10

**1219G40 L40" W10"H14.8 L6**

## **Congratulations !**

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

**1219G40 L40" W10"H14.8 L6**

### **Cleaning and Maintenance of Chandelier Frame**

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

### **Cleaning and Maintenance of Crystals**

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

### **To Order Crystal Replacement Parts**

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior to shipment. All orders must be pre-paid.

**1219G40 L40" W10"H14.8 L6**

### **Elegant Lighting Warranty**

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department.

A written return authorization form will be sent to you with specific instructions.

**1219G40 L40" W10"H14.8 L6**

### **Returns and Conditions of Warranty**

Returns must be pre-authorized by contacting our customer service department. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.