


## **DuraStyle One-Piece toilet** # 215751..05 / 215751..051 / 215751..85 / 215751..851

|< 14 5/8" Inch >|



One-Piece toilet	Dimension	Weight	Order number
US-version toilet, only in combination with SensoWash, syphonic, 12" rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet, cUPC listed	1		
Colors			
00 White 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
♦ 1.32/0.92 gpf, with dual flush piston valve, top flush	14 5/8" x 28 3/8" Inch	121.3 lb	21575105
♦ 1.32/0.92 gpf, with dual flush piston valve, top flush	14 5/8" x 28 3/8" Inch	121.3 lb	215751051
♦ 1.28 gpf, with Single Flush piston valve, top flush	14 5/8" x 28 3/8" Inch	121.3 lb	21575185
♦ 1.28 gpf, with Single Flush piston valve, top flush	14 5/8" x 28 3/8" Inch	121.3 (b	215751851
Mounting set for One-piece and Two-piece toilets, 1/2", US-version		1.1 \b	001417
Suitable products			
SensoWash DuraStyle C by Starck shower-toilet with concealed connections, remote control included, power actuated lid and seat, rear-, front and oscillating wash, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, self-cleaning wand, 2 individually programmable user profiles, night light, Quick release: easy seat unit removal and attachment, on / off-button, cIAPMO®ELECTRICAL, 14 3/4" x 20 1/2" Inch	14 3/4" x 20 1/2" Inch		610200

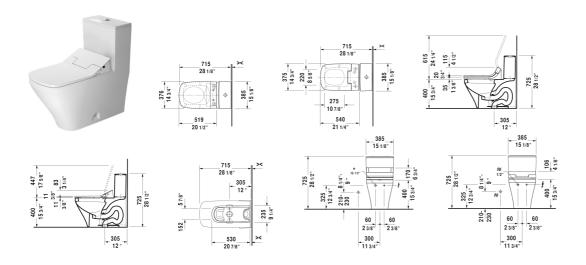

## **DuraStyle One-Piece toilet** # 215751..05 / 215751..051 / 215751..85 / 215751..851

|< 14 5/8" Inch >|

SensoWash Slim shower-toilet seat with concealed connections, remote control included, self-cleaning wand, Locking function via remote control, rear-, front and oscillating wash, with slow close, night light, Seat and lid easy removable one-handed, Automatic drainage in periods of prolonged disuse, on / off-button, cIAPMO®ELECTRICAL, 14 3/4" x 21 1/4" Inch	14 3/4" x 21 1/4" Inch	611200

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.