

GM3.112SH-SH0



### **Information**

- 3/4" thermostatic valve and trim
- 8" showerhead with 12" wall-mounted shower arm
- Flush-mounted swivel body sprays (3 pieces)
- Wall-mounted slide bar set with handshower and 59" hose
- Stop/volume control valve and 2-way diverter valve
- Showerhead features no-clog, easy-clean spray nozzles
- Optional extension kit
- 3/4" thermostatic rough valve flow rate ~12.9 gpm @60 psi
- Flow rates: showerhead  $\leq$  1.8 max gpm, handshower  $\leq$  1.5 max gpm, body sprays  $\leq$  1.5 max gpm each





### **Information**

- 12.9 gpm @ 60 psi
- 3/4" universal inlets
- Built-in service stops
- Stacking outlet feature
- Complete serviceability from front of all units
- Supplied with protective plastic cover
- CalGreen compliant dependent on functions







- 12.9 gpm @ 60 psi
- 3/4" universal inlets
- Built-in service stops
- Stacking outlet feature
- Complete serviceability from front of all units
- Supplied with protective plastic cover
- CalGreen compliant dependent on functions


### Code Compliance


• CALGreen

### Warranty

• Limited lifetime warranty


For complete warranty information go to www.graff-faucets.com/en/info/faqs

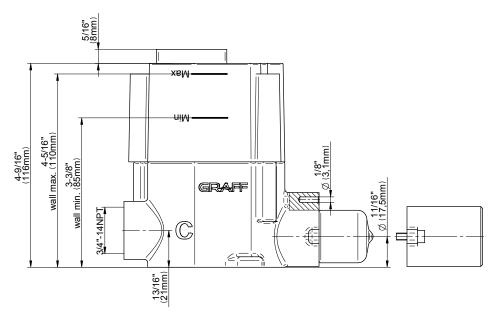

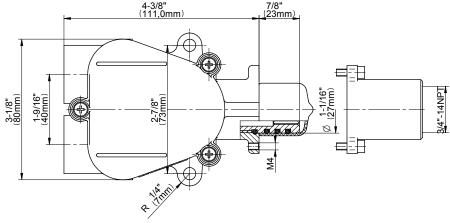



G-8043-SH-T

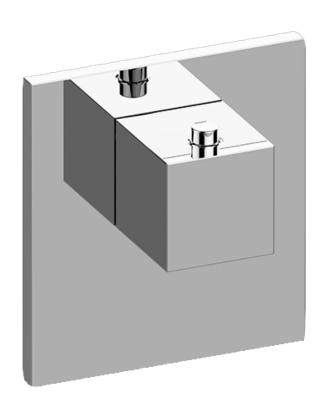


### **Information**

- Single metal handle
- Decorative trim plate
- Use with G-8006 thermostatic rough valve
- To complete package, you must order rough valve




# G-8043-SH-T

### Thermostatic Valve -Trim - M-Series

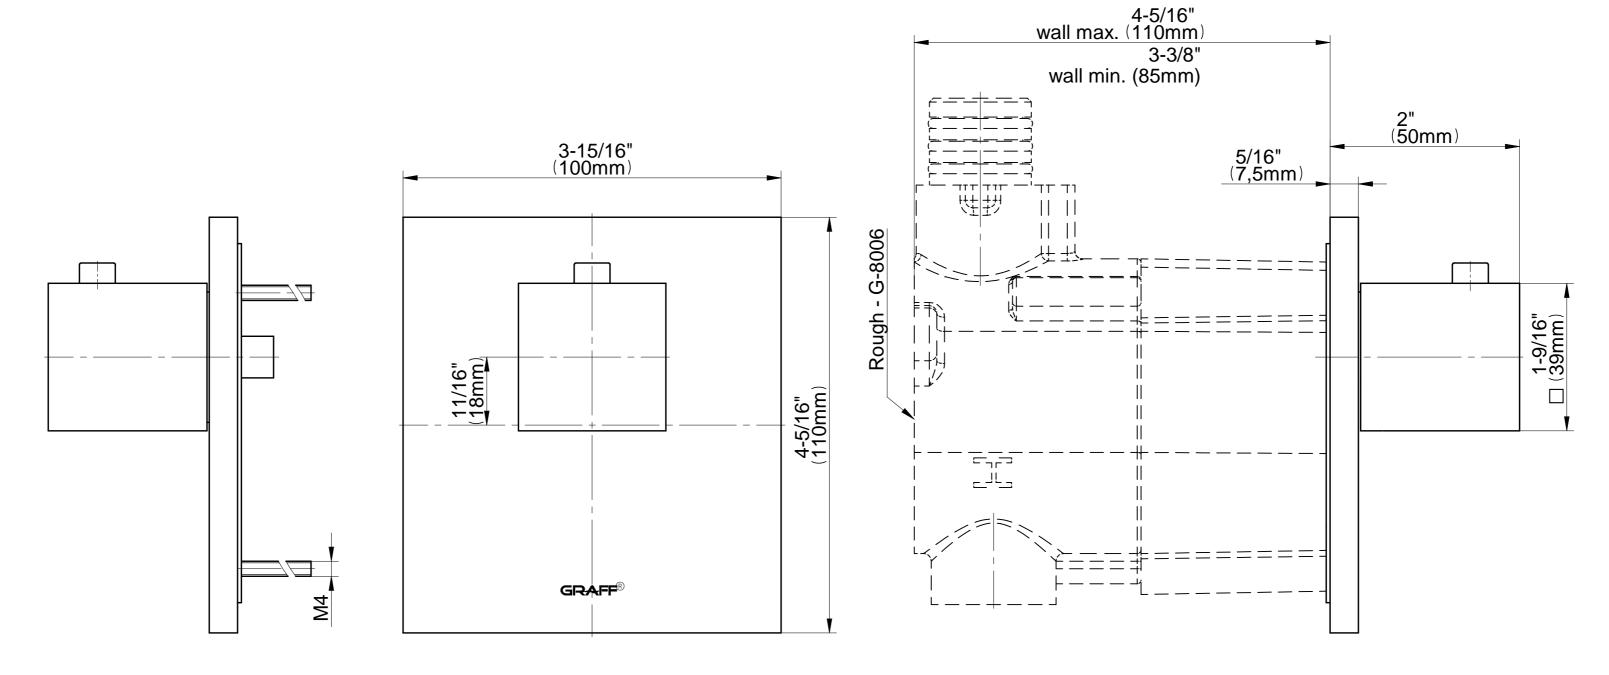





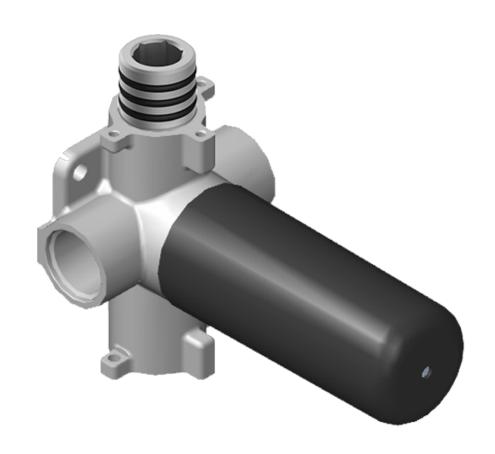

### **Information**

- 11.7 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Operates one function at a time
- Stacking inlet and pass-through port feature
- Supplied with protective plastic cover
- CALGreen compliant depending on functions







- 12.1 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Stacking inlet and pass-through port feature
- Supplied with protective plastic cover
- CalGreen compliant dependent on functions


### Code Compliance

• CALGreen

### Warranty


• Limited lifetime warranty

For complete warranty information go to www.graff-faucets.com/en/info/faqs

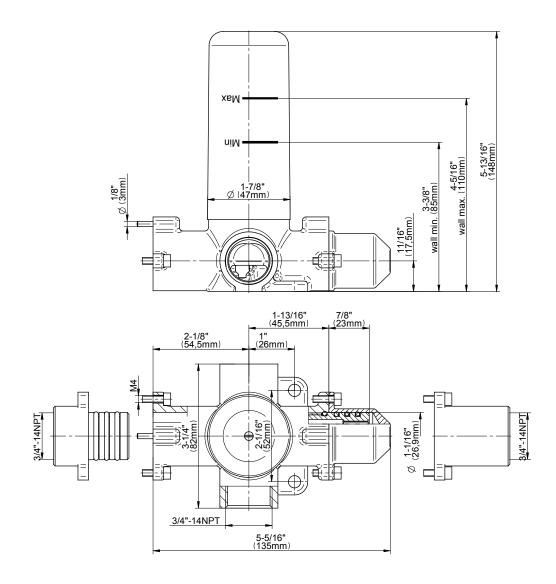

SHOWER
M-Series Square Two-Way
Diverter Valve Trim Plate and
Handle
G-8071-SH1-T







### **Information**


- Single metal handle
- Decorative trim plate
- Use with G-8052 2-way diverter (pass through) control rough valve WITH off function
- To complete package, you must order rough valve



## G-8071-SH1-T 2-way Diverter Valve - Trim - M-Series

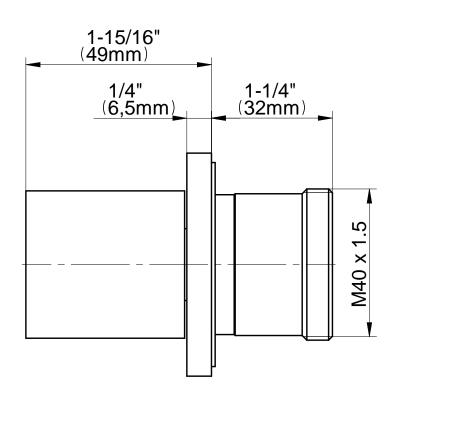


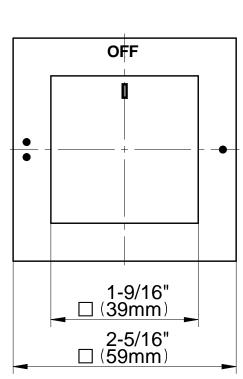

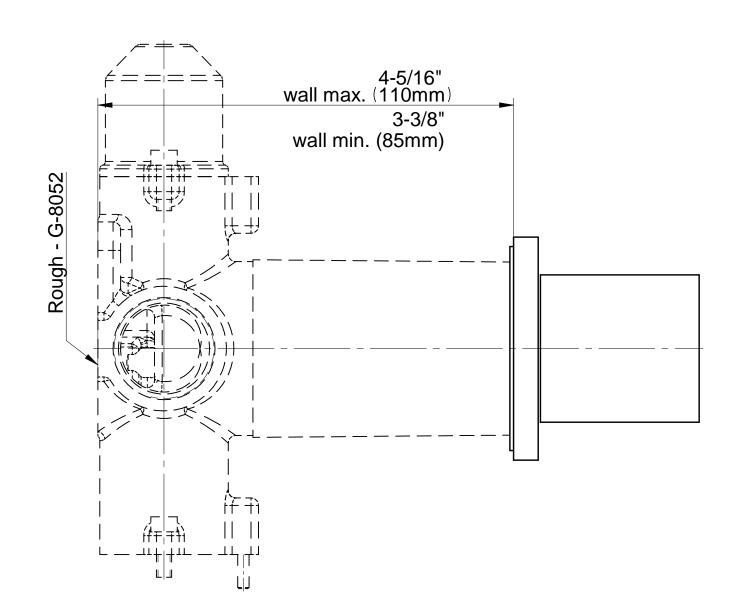





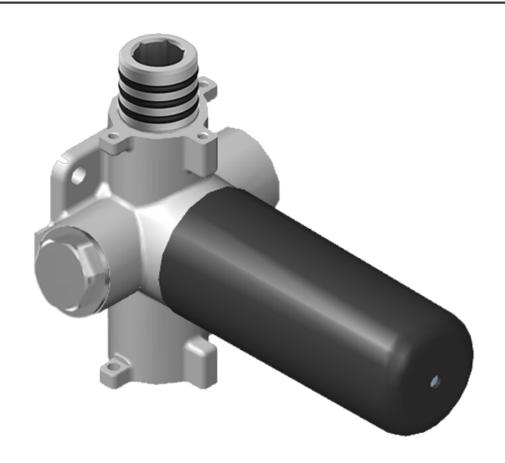

### **Information**

- 12.3 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Stacking inlet and pass-through port feature
- Supplied with protective plastic cover
- CalGreen compliant dependent on functions







- 13.2 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Stacking inlet and pass-through port feature
- Supplied with protective plastic cover
- CalGreen compliant dependent on functions


### Code Compliance


• CALGreen

### Warranty

Limited lifetime warranty


For complete warranty information go to www.graff-faucets.com/en/info/faqs

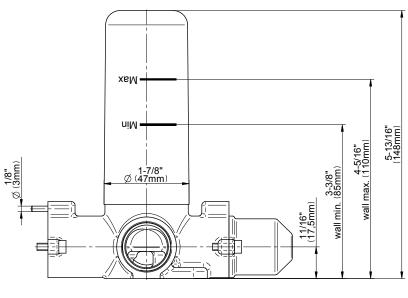

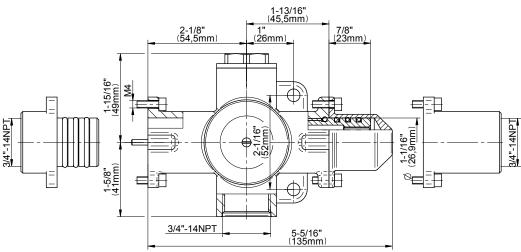



G-8098-SH1-T





### **Information**


- Single metal handle
- Decorative trim plate
- Use with G-8076 Stop/Volume Control rough valve with Pass-Through or G-8077 Stop/Volume Control rough valve
- To complete package, you must order rough valve



### G-8098-SH1-T Stop/Volume Control Valve - Trim - M-Series

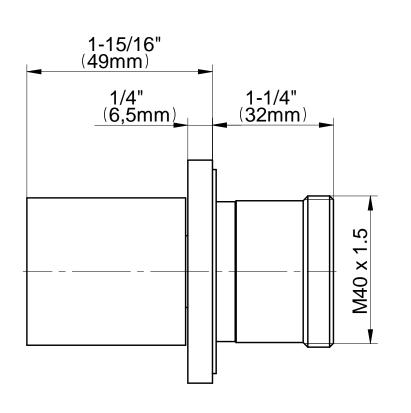

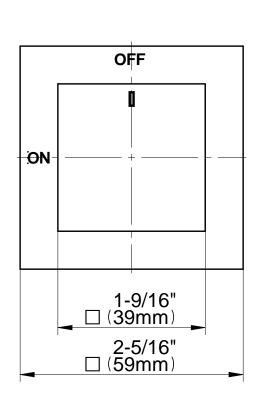

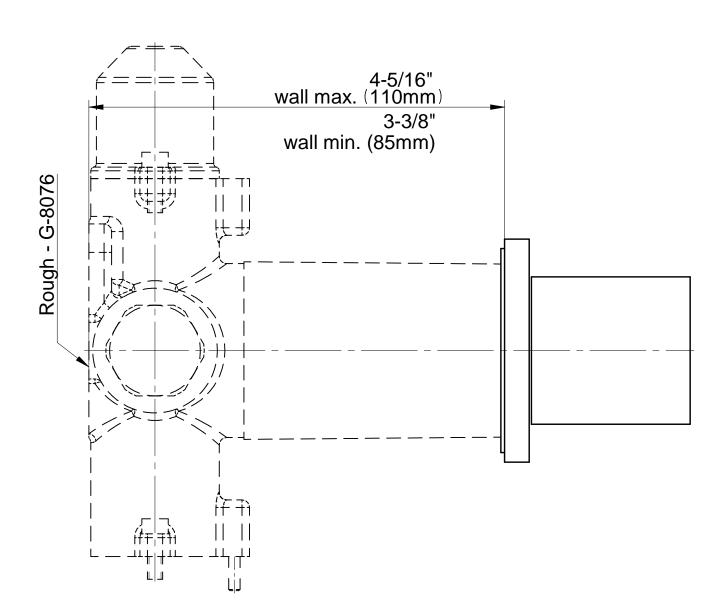







### **Information**

- 8" square, low-profile rainshower head
- 12" shower arm and flange
- 144 no-clog, easy-clean rubber spray nozzles
- Showerhead flow rate ≤ 1.8 max gpm
- CALGreen







- 1/4" thick, 8" round, low-profile rain showerhead
- 12" shower arm includes flange
- 144 no-clog, easy-clean rubber spray nozzles
- 1/2" NPT male thread inlet
- Showerhead flow rate ≤ 1.8 max gpm

### Available Finishes

- Polished Chrome G-8355-PC
- Brushed Nickel
   G-8355-BNi
- Polished Nickel G-8355-PN
- Unfinished Brass\*G-8355-UB\*
- SteelnoxG-8355-SN
- Olive Bronze\*
   G-8355-OB\*
- Architectual Black with Chrome Accents\*
   G-8355-PC/BK\*
- Gold\*
   G-8355-AU\*
- Brushed Gold\*G-8355-BAU\*


### Code Compliance

CALGreen

### Warranty

Limited lifetime warranty

For complete warranty information go to www.graff-designs.com/en-nam/warranty

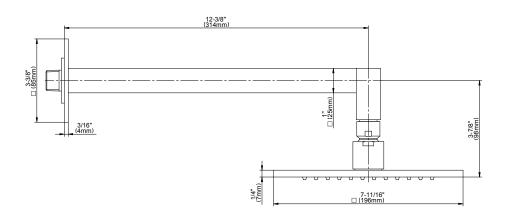





### **Information**

- 12 no-clog, easy-clean silicon jets
- Metal ball-joint allows for 36° angle adjustment of body spray
- Brass wall escutcheon and flush-mounted trim
- 1/2" NPT female thread inlet
- Body spray flow rate ≤ 1.5 max gpm







- 12 no-clog, easy-clean silicon iets
- Metal ball-joint allows for angle adjustment of body spray
- Brass wall escutcheon and flush-mounted trim
- 1/2" NPT female thread inlet
- Aerated flow rate 1.5 gpm


### Available Finishes


- Polished Chrome G-8497-PC
- Polished Nickel G-8497-PN
- Steelnox® G-8497-SN
- Olive BronzeG-8497-OB\*
- Architectural Black w/Chrome Accents
   G-8497-PC/BK\*

### Warranty

Limited lifetime warranty

For complete warranty information go to http://www.graff-faucets.com/en/info/faqs









### Information

- Handshower with 28" wall-mounted slide bar
- 59" shower hose and wall supply elbow
- Bracket fits all hoses with conical nut
- Handshower flow rate ≤ 1.5 max gpm
- Includes internal backflow preventer
- CALGreen







- Handshower with 23" wall-mounted slide bar
- 59" shower hose and wall supply elbow
- Bracket fits all hoses with conical nut
- Includes Contemporary Square Handshower - G-8644
- Includes 1/2" NPT male threaded wall supply elbow
- Handshower flow rate ≤1.5 max gpm

### Available Finishes

- Polished Chrome G-8670-PC
- Steelnox® G-8670-SN
- Polished Nickel G-8670-PN
- Olive Bronze
   G-8670-OB
- Architectural Black with Chrome Accents G-8670-PC/BK

### Code Compliance

CALGreen

### Warranty

Limited lifetime warranty

For complete warranty information go to: www.graff-faucets.com/en/info/faqs

