


160.7200 | Two Output Shower W/ Rain Head & Hand Held & Slide Bar

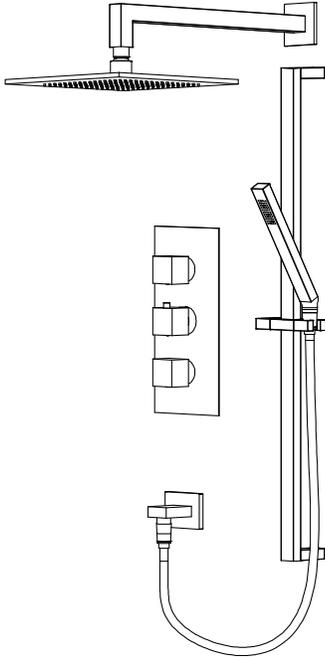

COMPONENTS

- HS1011SA - 16" Shower Arm
- HSB.10S - 10" Shower Head
- 160.4401T - Shower Trim
- TVH.4401 - Shower Valve
- HS1006H - Hand Held
- 160.5505 - Wall Elbow
- SP.150EM - 1.5m Hose
- 160.601003A - Slide Bar

SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Bottom handle controls handheld
- Top handle controls shower head
- Middle handle controls temperature
- Shared port operation

SHOWER HEAD:

- Solid brass construction
- 1.8 GPM flow rate

HAND HELD W/ SLIDE BAR & ELBOW:

- Solid Brass construction
- Hand held flow rate = 1.8 GPM
- 1/2" female NPT elbow connection

STANDARDS:

- ASME A112.18.1 / CSA B125.1

See individual component specification sheets on following pages for further details.




HS1011SA | Square Shower Arm - 400mm - 16"

SPECIFICATIONS:

- Solid Brass Shower Arm
- With Sliding Flange

FAST SHIP FINISHES :

- Chrome - HS1011SACP / Brushed Nickel - HS1011SABN

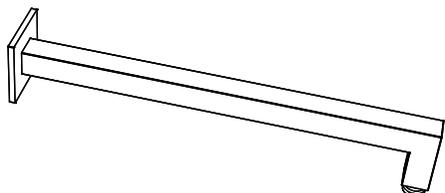


Legislation Compliance



ZeroDrip Technology



Technical Diagram

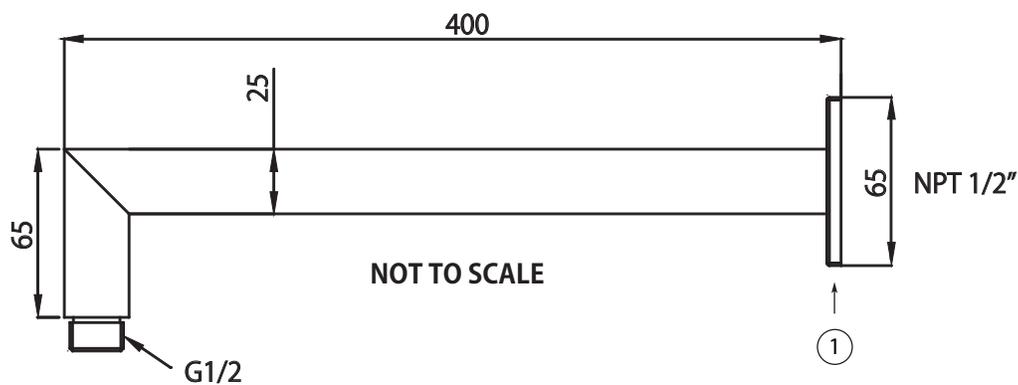


Part Number Guide:

- ① Flange - HS1001SA-1253CP - Chrome
HS1001SA-1253BN - Brushed Nickel

HSB.10S | 10" Brass Shower Head

SPECIFICATIONS:

- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 1.8 GPM Flow Rate
- 256 Nozzles - [16 x 16]

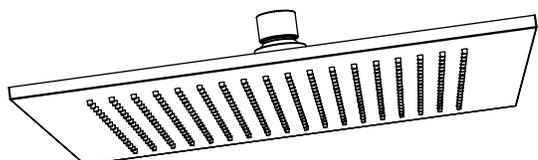


Legislation Compliance



ZeroDrip Technology




Technical Diagram

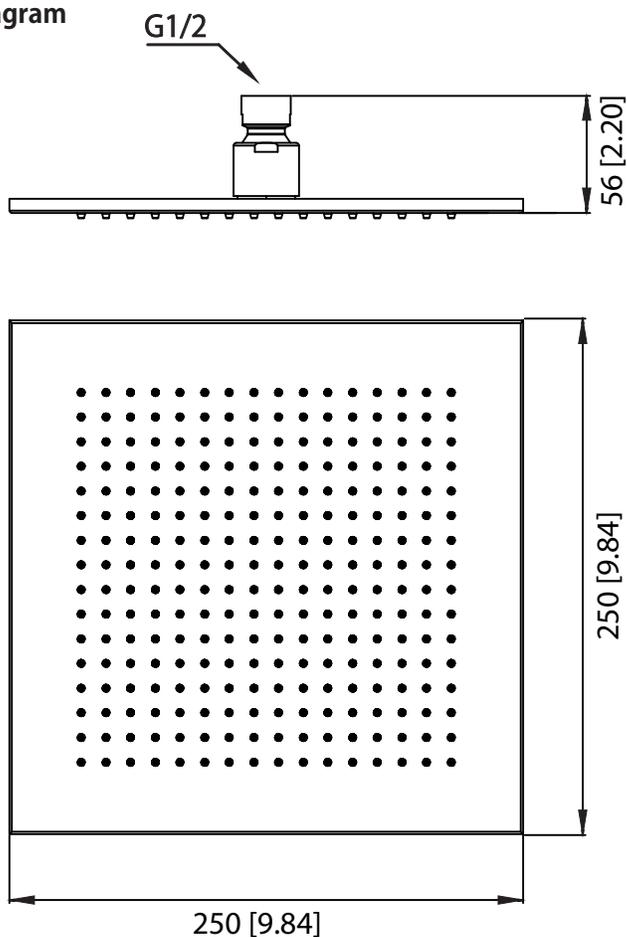


MATCHING SHOWER ARMS:

- 1) HS1011SA (16" Wall Mount Shower Arm)

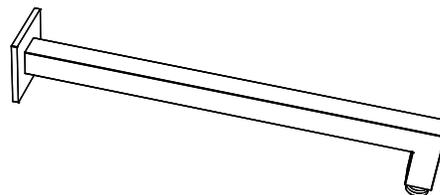

- 2) 160.6CSA (6" Ceiling Mount Shower Arm)

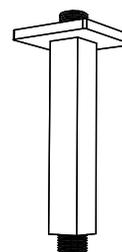





160.4401 | 3/4" Thermostatic Valve With 2 Independent Volume Controls

SPECIFICATIONS:

- Turn middle knob to control temperature.
- Turn top knob to control water flow from top output.
- Turn bottom to control water flow from bottom output.
- Thermostatic Valve Flow Rate - 13.0 GPM @ 60 PSI
- Both outputs can be activated at once.
- Extension Available - TVH.4401E**

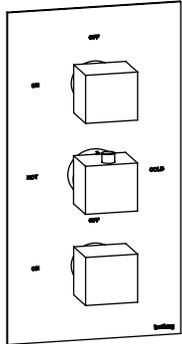

Trim
[160.4401T**]

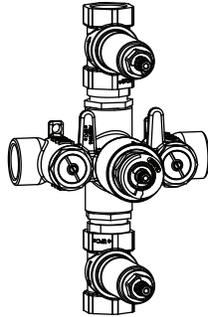

Valve
[TVH.4401]

Belgian Mirror Finish




Legislation Compliance




ZeroDrip Technology



Technical Diagram

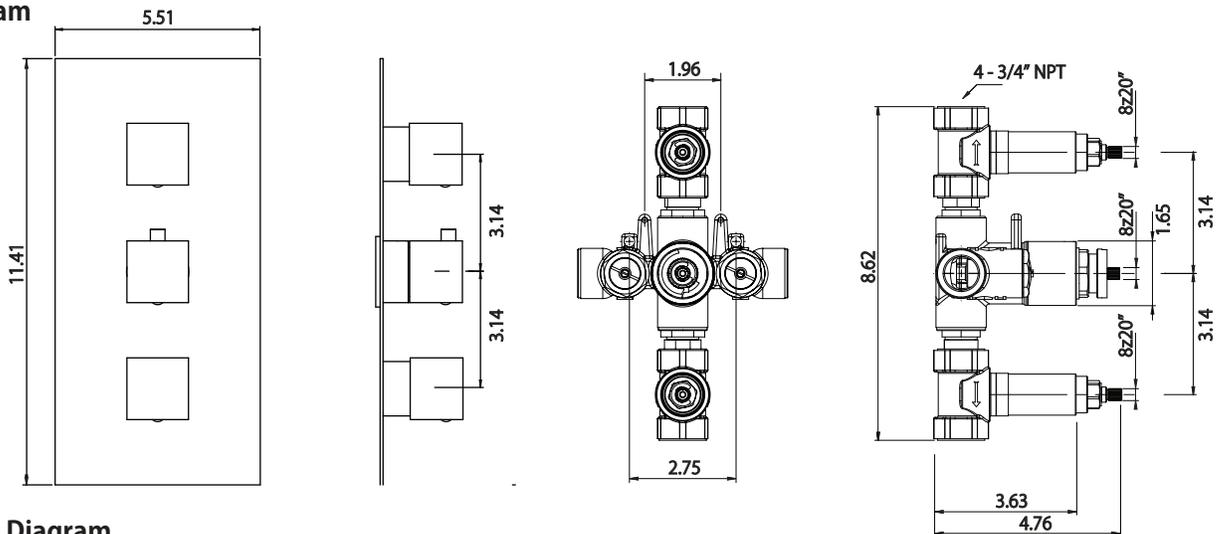

Water Diversion Diagram

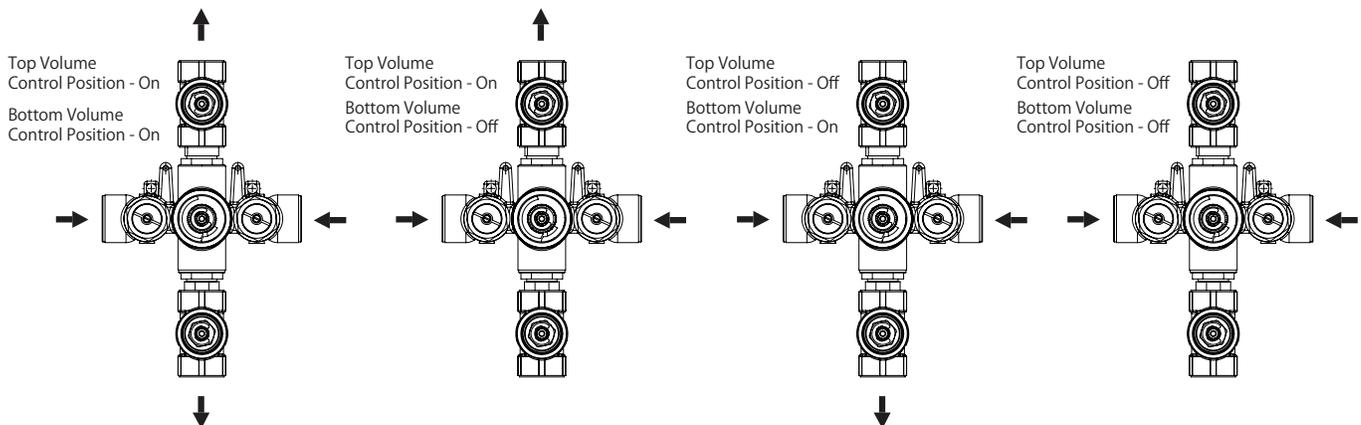

TVH.4401 | 3/4" Thermostatic Valve With 2 Independent Volume Controls Page 1 of 2



SPECIFICATIONS:


- Turn middle knob to control temperature.
- Turn top knob to control water flow from top output.
- Turn bottom to control water flow from bottom output.
- Thermostatic Valve Flow Rate - 13.0 GPM @ 60 PSI

STANDARDS:

- ASME A112.18.1 / CSA B125.1

WARRANTY:

- Limited lifetime warranty to the original consumer purchaser against finish and workmanship

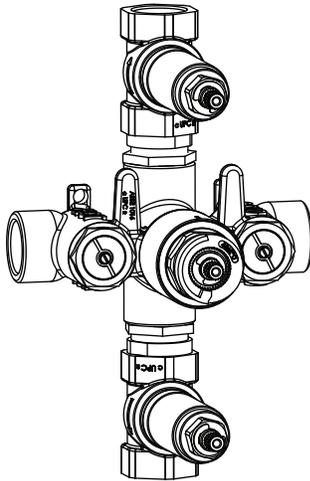


Legislation Compliance



ZeroDrip Technology




Technical Diagram

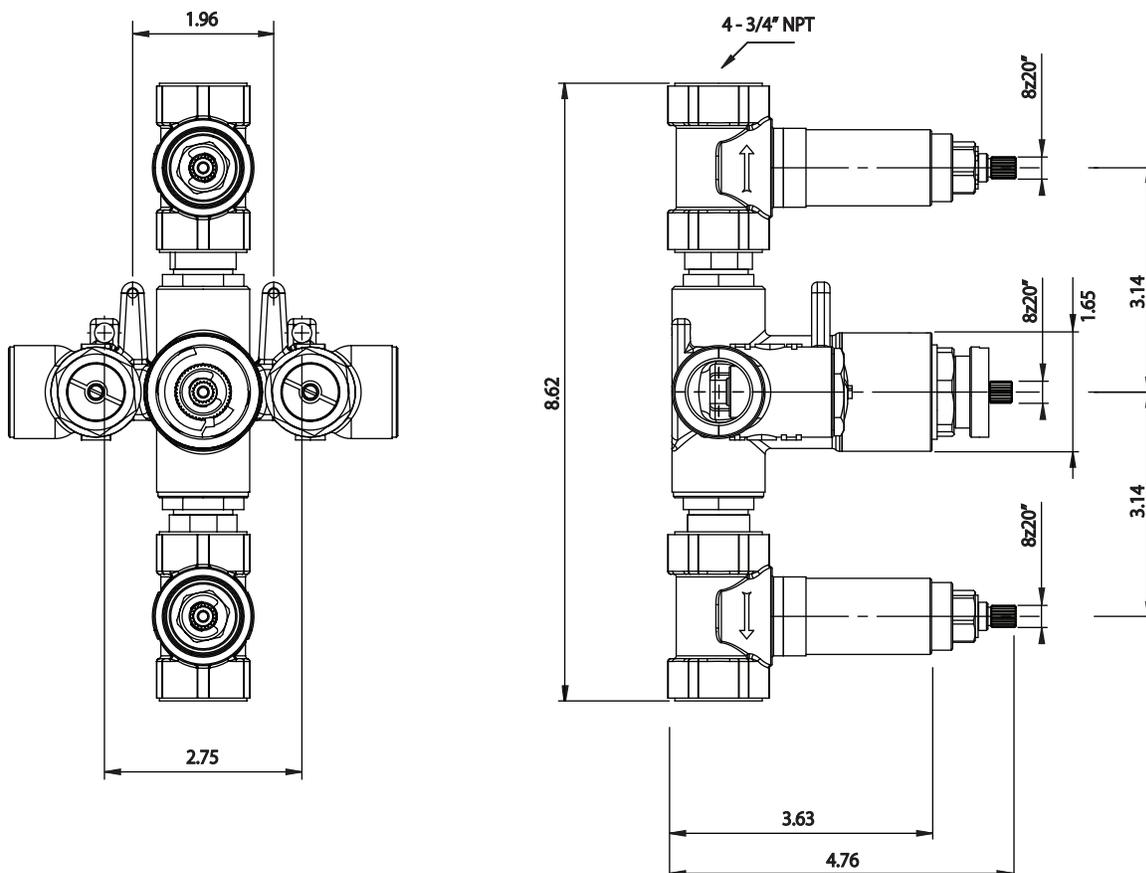

TVH.4401 | 3/4" Thermostatic Valve With 2 Independent Volume Controls Page 2 of 2




Water Flow Diagram

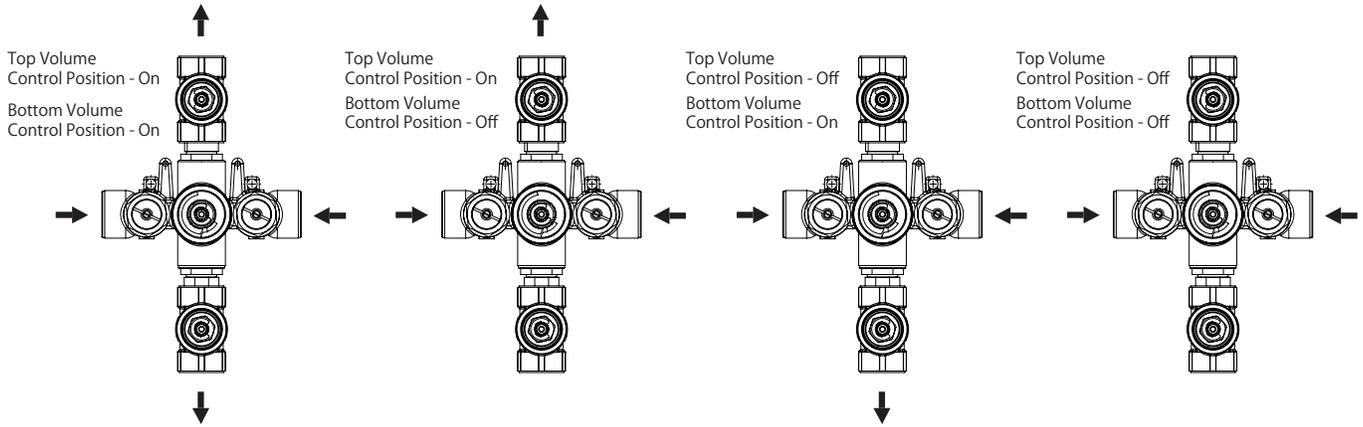

HS1006H | Solid Brass Hand Shower

SPECIFICATIONS:

- Solid Brass Construction
- 1.8 GPM Flow Rate
- With back flow prevention check valve

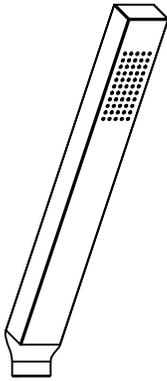


Legislation Compliance



ZeroDrip Technology




Technical Diagram

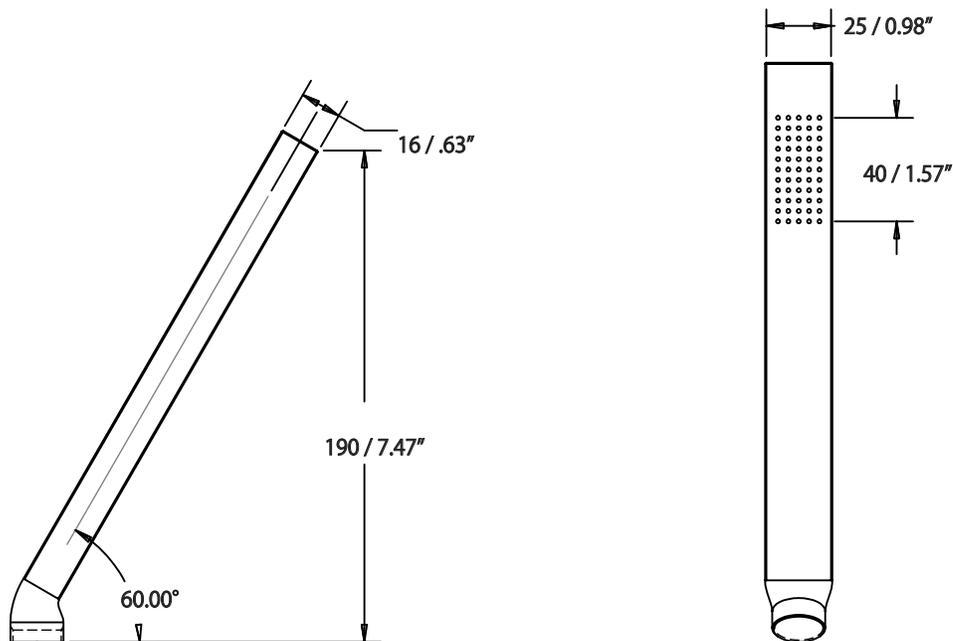

160.5505 | Wall Elbow

SPECIFICATIONS:

- Solid Brass construction
- 1/2" female connection with adjustable slide on installation
- Includes check valve with back-flow prevention

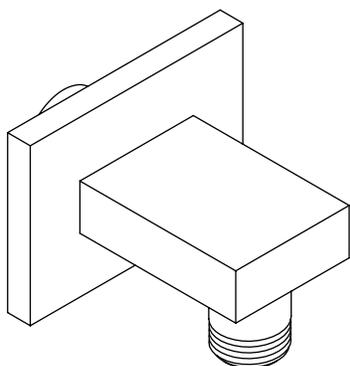




Legislation Compliance





ZeroDrip Technology



Technical Diagram

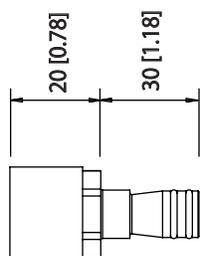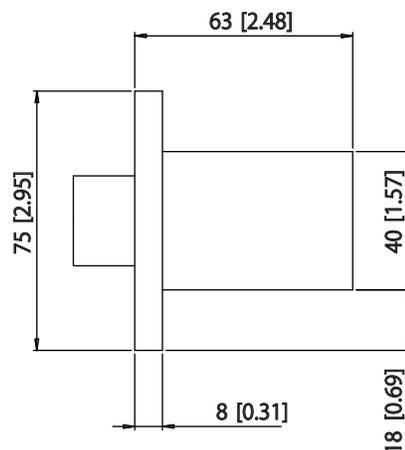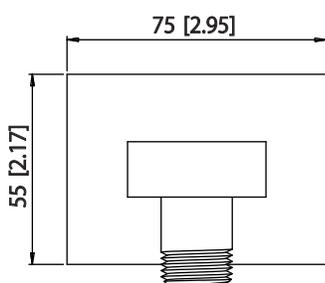

Female NPT 1/2" Connector
Part # - FEM.5505

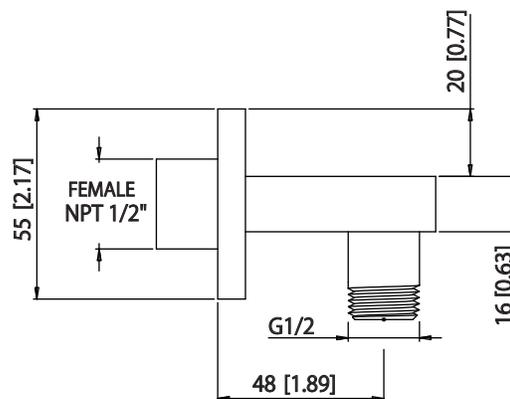

SP.150EM | Easy Maneuver Hose



SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length


Legislation Compliance




ZeroDrip Technology



Technical Diagram

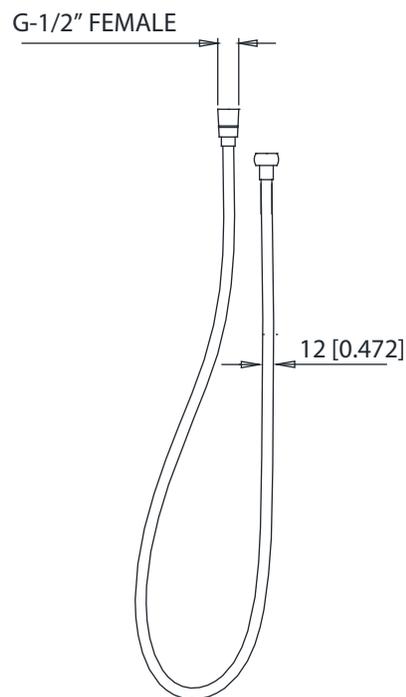

160.601003A | Slide Bar



SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation

FAST SHIP FINISHES :

- Chrome - 160.601003ACP / Brushed Nickel - 160.601003ABN

Legislation Compliance



ZeroDrip Technology



Technical Diagram

