




Installation Guide



**Circular
KFF502**

Before Installation



CAUTION

Failure to read these instructions prior to installation may result in personal injury, property damage, or product failure. Manufacturer assumes no responsibility for product failure due to improper installation.



DO NOT RETURN TO STORE

If you have any trouble, contact us before reaching out to the retailer. we'll make it right. Our customer service team will be glad to assist you with any assembly, missing part or questions that you may have about your products.

Contact KIBI 📞 855-883-0888 ✉️ support@kibiusa.com 🌐 www.kibiusa.com

PRIOR TO INSTALLATION

- 1- For best results, we recommends that this unit be installed by a licensed, professional plumber.
- 2- Please read over these instructions thoroughly before beginning installation. Make sure that you have all tools and supplies needed to complete the installation.
- 3- Please flush the water system to ensure that no metal swarf, solder, and other impurities can enter the faucet that might damage the cartiridge. (Most of the leakages and water flow issues are from avoiding this very necessary step).
- 4- Turn off the hot and cold water lines at the angle valve and turn on the old faucet to release any built-up pressure.
- 5- Keep this booklet and the receipt (or other proof of date and place of purchase) for this product in a safe place. The receipt is required should it be necessary to request warranty parts.
- 6- Please keep the box and packaging materials until your product is completely installed and functional.

Cleaning and Care

Clean the faucet often with a soft cloth to keep it looking like new. For heavy cleaning you can use mild liquid detergents or non-abrasive liquid polisher. Rinse with water and dry with a soft cloth. Avoid abrasive cleaners, steel wool and harsh chemicals as these will dull the finish and void your warranty.

Tools you may need



Plumbers Tape




Safety Glasses



Phillips Screwdriver




Wrench




Silicone sealant

Dimensions

Critical dimensions show in mm

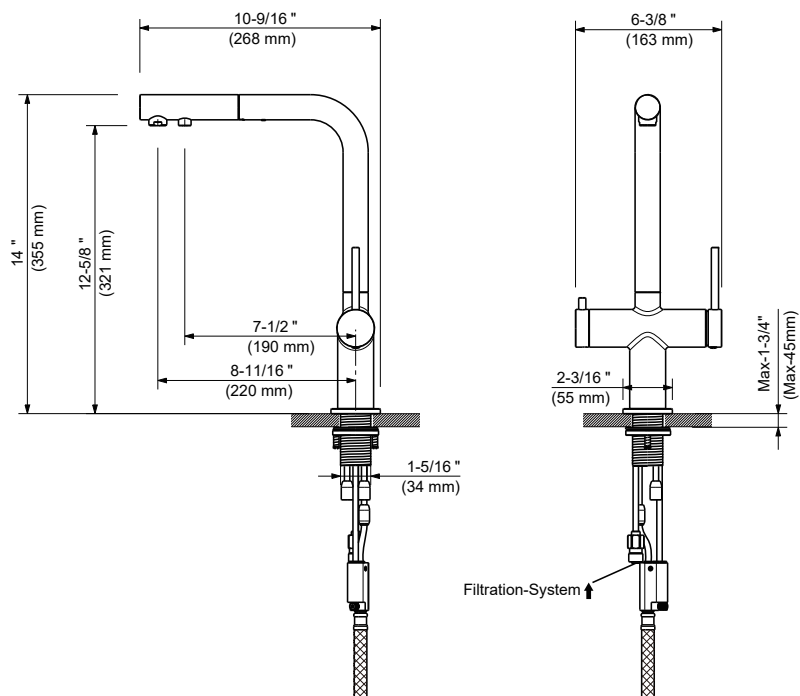


Parts List

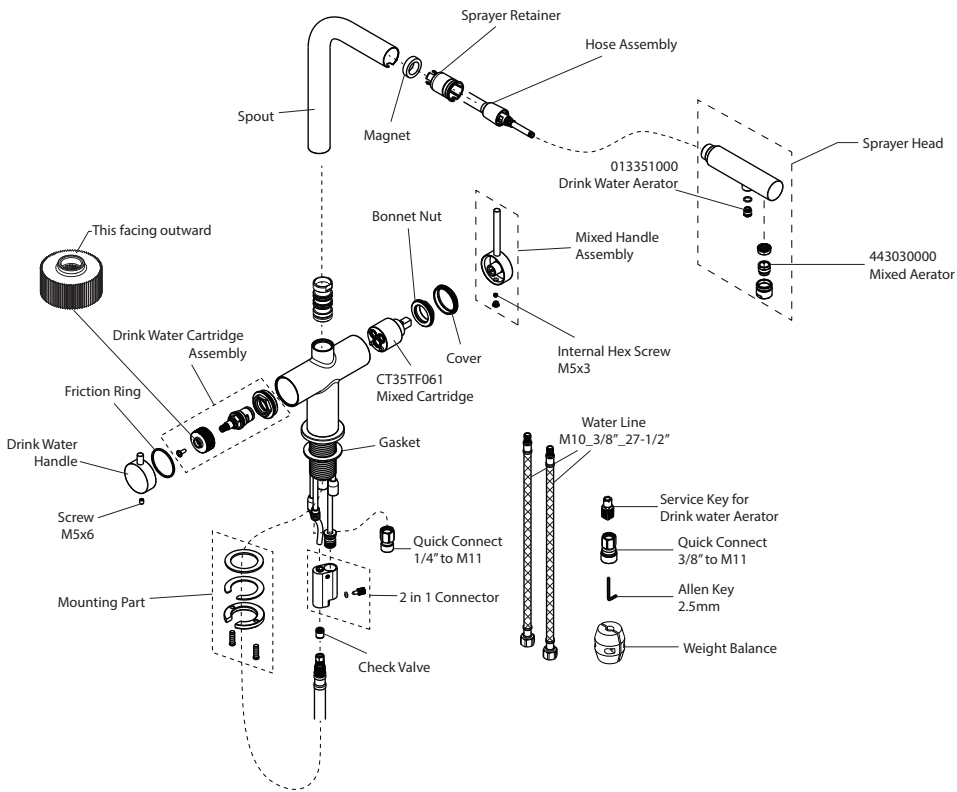

Faucet Installation


1

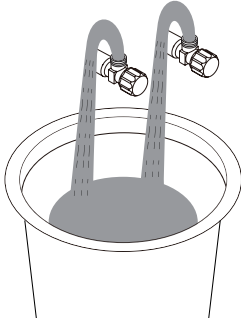

Shut off water suppliers. Remove the old faucet, clean the mounting surface.


Note: For first time install, flush the pipes first by open the angel valve to run 60s.

2




Remove the mounting hardware from the mounting pipe.

3




Insert the pull-out hose into the connector and tighten it using a hex wrench from the side of the connector. Then, pull the hose gently to test if it is securely locked in place.

4




Put the rubber O-ring into the bottom gap of faucets then Insert faucet into faucet hole.

5



From underneath the countertop, Slide rubber washer, metal washer and mounting bracket onto the thread shank.


6



Adjust position of faucet body if necessary, Then tighten the mounting nuts with phillips screwdriver until snug.


Faucet Installation

7

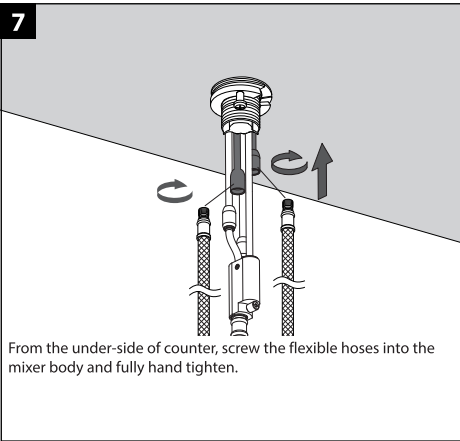


From the under-side of counter, screw the flexible hoses into the mixer body and fully hand tighten.

8

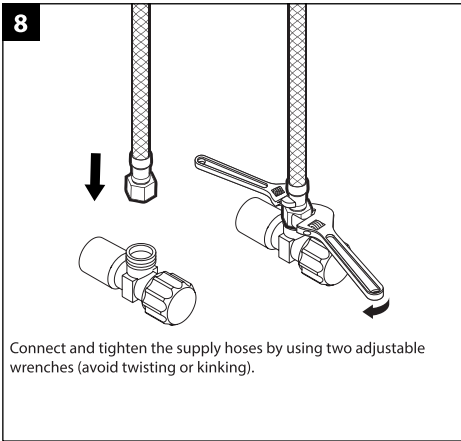


Connect and tighten the supply hoses by using two adjustable wrenches (avoid twisting or kinking).

9A

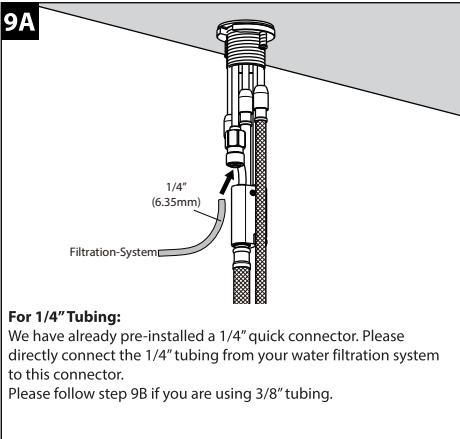


For 1/4" Tubing:
We have already pre-installed a 1/4" quick connector. Please directly connect the 1/4" tubing from your water filtration system to this connector. Please follow step 9B if you are using 3/8" tubing.

9B

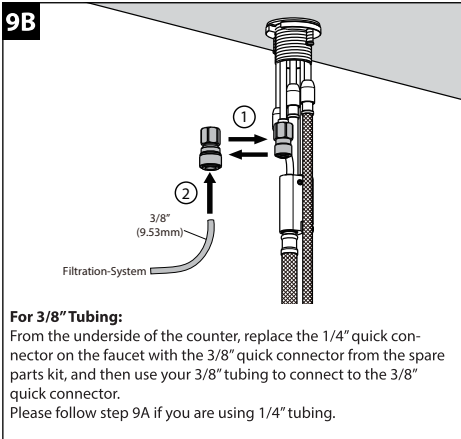


For 3/8" Tubing:
From the underside of the counter, replace the 1/4" quick connector on the faucet with the 3/8" quick connector from the spare parts kit, and then use your 3/8" tubing to connect to the 3/8" quick connector. Please follow step 9A if you are using 1/4" tubing.

10

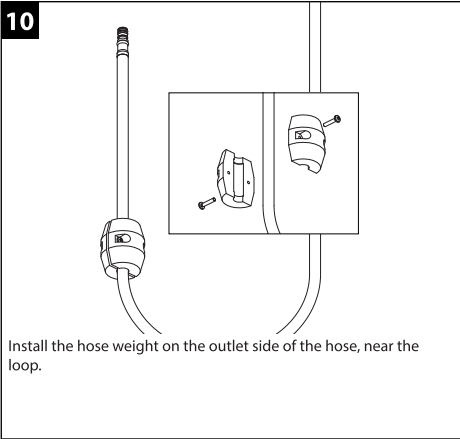

Install the hose weight on the outlet side of the hose, near the loop.

11

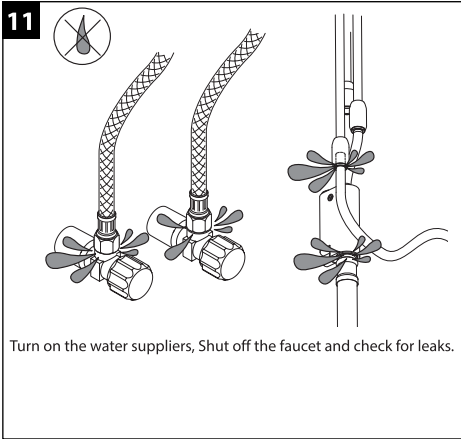

Turn on the water suppliers, Shut off the faucet and check for leaks.

Trouble-Shooting

If you've followed the instructions carefully and your faucet still does not work properly, take these corrective steps.

Problem	Cause	Action
Low flow	Aerator or Filter may be clogged	Unscrew aerator to check rubber packing or replace aerator. (Note: some models require wrench to remove aerator.)
Faucet leaks from under handle	Bonnet nut has come loose or cartridge needs to be reseated	Remove handle and cap. Using a wrench, ensure bonnet nut is tight.
If leak persists, faucet leaks from spout outlet, water does not shut off completely	Cartridge may need to be adjusted or replaced	SHUT OFF WATER SUPPLIES. Replace cartridge. When reinstalling parts, make sure bonnet nut is tightened securely with a wrench. WARNING: Failure to securely tighten bonnet nut with a wrench could result in water damage.
Leaking between spray head and the hose	Spray head may be loose or washer is not seated correctly in the hose connection	Tighten spray head by hand until snug. Make sure washer is seated correctly
Hose does not retract	Weight may be installed incorrectly	Readjust weight on hose

LIMITED LIFETIME WARRANTY

Thank you for choosing Kibi USA faucets and accessories. We are dedicated to providing you with exceptional products that are built to last. Kibi USA is proud to offer a comprehensive limited lifetime warranty on our kitchen and bathroom faucets and accessories. Here are the details of our warranty policy:

Kibi USA warrants the structure and finish of the faucets and accessories to be free from defects in material and workmanship under normal usage for as long as the original purchaser resides in the residence in which the product was first installed. Additionally, the following warranty periods apply to specific components:

- **Sprayhead Assembly:** Kibi warrants the sprayhead assembly, including the engine, aerators, structure, restrictors, backflow preventers, sprayer hoses, and braided supply line hoses (nylon, silicon, and stainless steel), to be free from defects in material and workmanship under normal usage for a period of one (1) year from the date of purchase.
- **Cartridge:** Kibi warrants the faucet's cartridge to be free from defects in material and workmanship under normal usage for a period of five (5) years from the date of purchase.