

Model: **KSF403**

Circular Pressure Balanced 2-Function Shower System with Rough-In Valve

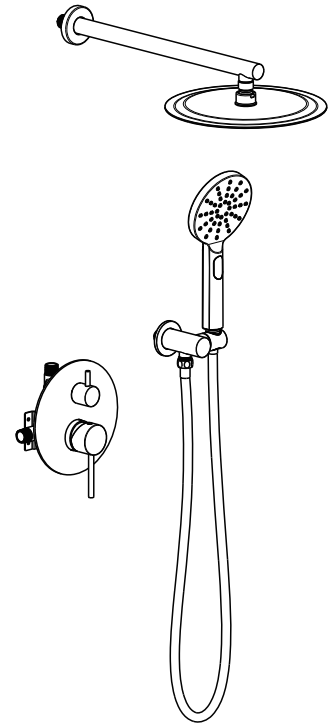
SPEC SHEET

Features





- Heavy brass construction for durability and reliability.
- Back-to-Back installation capabilities.
- All parts replaceable from the front of the valve.
- Pressure balancing ceramic cartridge ensures anti-scald operation and life long trouble-free service.
- Single lever handle operation allows both volume and temperature control.
- Max-temperature limit stop for added safety.
- Dual inlet and outlet ports – 1/2" CxC soldering & 1/2" NPT thread.
- Adjustable installation depth from 1-3/4" (45mm) to 2-15/16" (75mm).
- Mud guard is provided to help protect valve from dust and debris during installation.
- Limited lifetime warranty

Include

Shower valve set, Shower arm, Head shower, Hand shower, Shower hose, Shower holder with water supply.



Available Finishes

Finish	Code	Description
	CH	Chrome
	BN	Brushed Nickel
	MB	Matt Black
	BG	Brushed Gold

