LIVING

Collection:Ezra


Installation manual for:

LD7304W22BRA W21.5"*E7.5" H7.6" L3

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert the mounting bracket screw(P2) into the mounting bracket (P1).
- 6.Useing the screw(P3) to lock the lamp body onto the mounting bracket (P1) on the wall.
- 7.Install E12 light source.(Bulbs not supplied).
- 8. Twist the glass shade(P11) onto the lamp body.

The end!

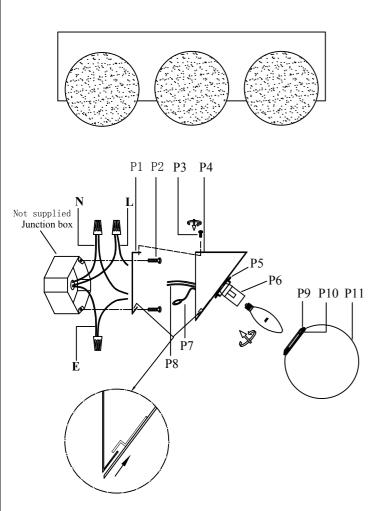

| Part Number | Part | Picture | Description | Qty |
|------------------|------|-----------|------------------------------|-----|
| MB7S19 | P1 | | Mounting bracket L15"*W4.7" | 1 |
| | P2 | | Mounting bracket screw | 2 |
| P-LD7304W22BRA-1 | P3 | 4 | Screw | 2 |
| | P4 | | Backplate (L21.5"*W5.5") | 1 |
| | P5 | 0 | Aluminum ring Φ2"*H0.4" | 3 |
| | P6 | | E12 holder | 3 |
| | P7 | | UL18#Ground wire,L9.8" | 1 |
| | P8 | \approx | UL18#,L8" | 1 |
| GS7R02BR | P9 | | Aluminum ring Φ2.7"*H0.3" | 3 |
| | P10 | | Plate Ф1.8"*Т0.1" | 3 |
| | P11 | | Glass shade Φ5.9"*H5.7" | 3 |

L'' = Hot wire

[&]quot;N" = Neutral wire

[&]quot;E" = Ground wire