UVING ISTRICT

Collection:Silas

Installation manual for: LD7301W24CH W24"*E6.9" H9.9" L3

Installation instructions:


- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4.Secure mounting bracket to the junction box.
- 5.Insert the mounting bracket screw(P2) into the mounting bracket (P1).

6.Useing the nut(P3) to lock the lamp body onto the mounting bracket (P1) on the wall.

7.Install E12 light source.(Bulbs not supplied).

8.Twist the glass shade(P12) onto the lamp body.

The end!

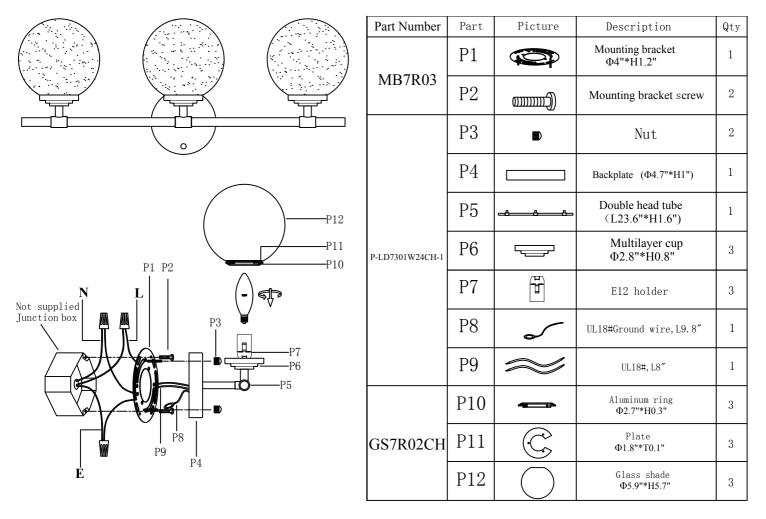

"L" = Hot wire "N" = Neutral wire "E" = Ground wire