UVING ISTRICT

Collection:Silas

Installation manual for: LD7302W6BLK W5.9"*E6.9" H11.7" L1

Installation instructions:


- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4.Secure mounting bracket to the junction box.
- 5.Insert the mounting bracket screw(P2) into the mounting bracket (P1).

6.Useing the nut(P3) to lock the lamp body onto the mounting bracket (P1) on the wall.

7.Install E12 light source.(Bulbs not supplied).

8.Twist the glass shade(P13) onto the lamp body.

The end!

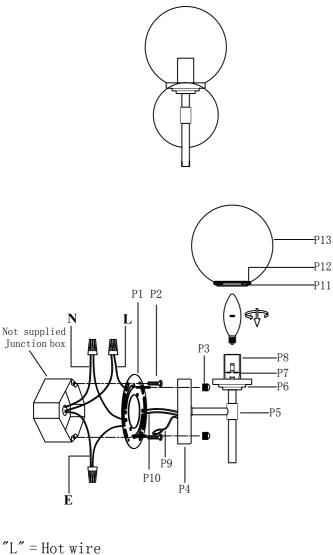

Part Number	Part	Picture	Description	Qty
MB7R03	P1		Mounting bracket Φ4"*H1.2"	1
	P2	ammin))	Mounting bracket screw	2
P-LD7302W6BLK-1	Ρ3		Nut	2
	P4		Backplate (Ф4.7"*H1")	1
	Ρ5		Double head tube (L5.3"*H3.8")	1
	P6		Multilayer cup Φ2.8"*H0.8"	1
	Ρ7		Light cup 01.2"*H2.0"	1
	Р8	μ	E12 holder	1
	Р9		UL18#Ground wire,L9.8"	1
	P10	\approx	UL18#, L8″	1
GS7R03BK	P11		Aluminum ring Φ2.7"*H0.3"	1
	P12		Plate Φ1.8"*T0.1"	1
	P13	\bigcirc	Glass shade Ф5.9"*H5.7"	1

"N" = Neutral wire "E" = Ground wire